

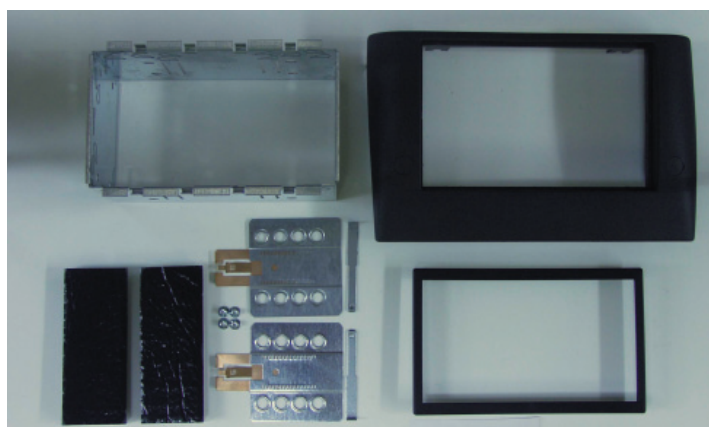


Installation manual for: **Fiat Stilo 2005 -->**



Installation kit includes the following items:



- * 1X 2-ISO 110 mm. metal bracket
- * 1X Radio trim
- * 1X Replacement panel
- * 2X Mounting plates
- * 2X Mounting spacers
- * 2X Radio removal keys
- * 4X Screws
- * 2X Cushion

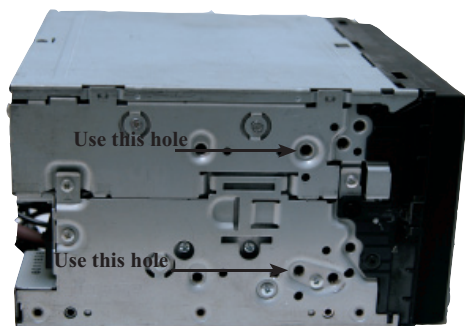

Kenwood DDX6029

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 6 & 8 marked with an arrow.
Measured from left to right.

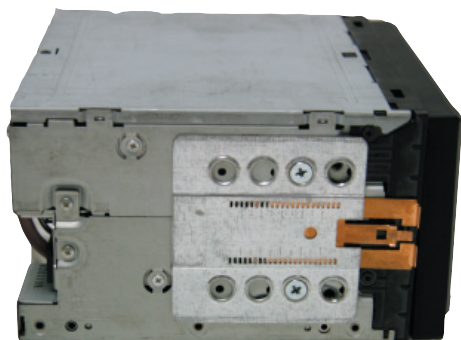

Kenwood DDX 7025

We advice to use the following positions.
Other positions are also possible.

Use position 1 marked with a cross.
Use position 14 & 16 marked with an arrow.
Measured from left to right.


* Mount the plates.

1



Remove the original radio using Philips keys.

2

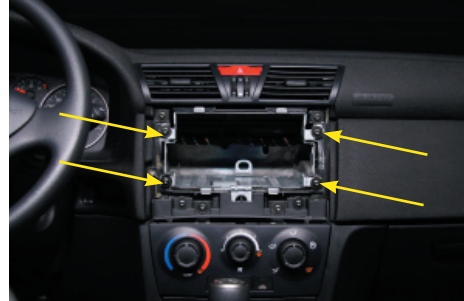

Remove the original bracket this is tighten by four screws.

3



Place the replacement panel and the 2-Din metal bracket.

4



Place the headunit.

Connect all of the needed wiring harnesses and check the connections carefully.